



# Installing a printer driver in Windows XP


In Control Panel, double click on "Printers and Faxes".

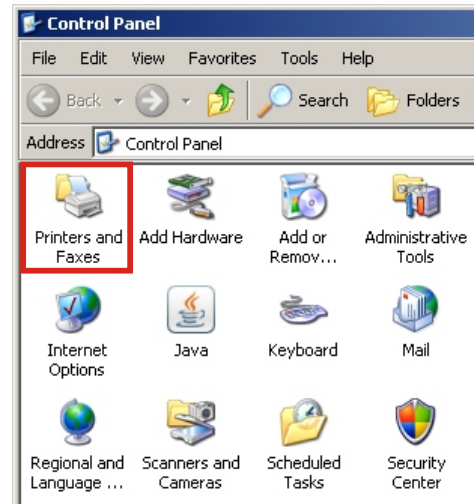


Double click "Add Prntrer".

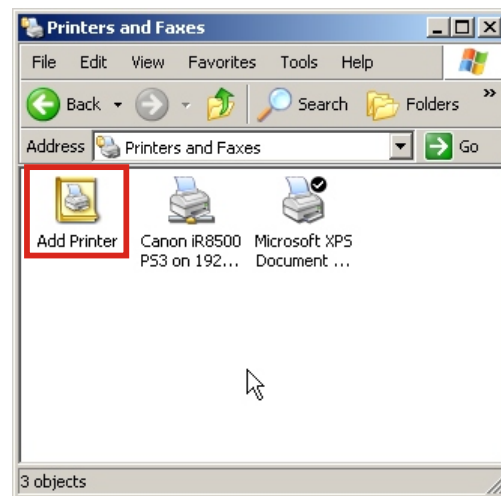


Click "Next >".

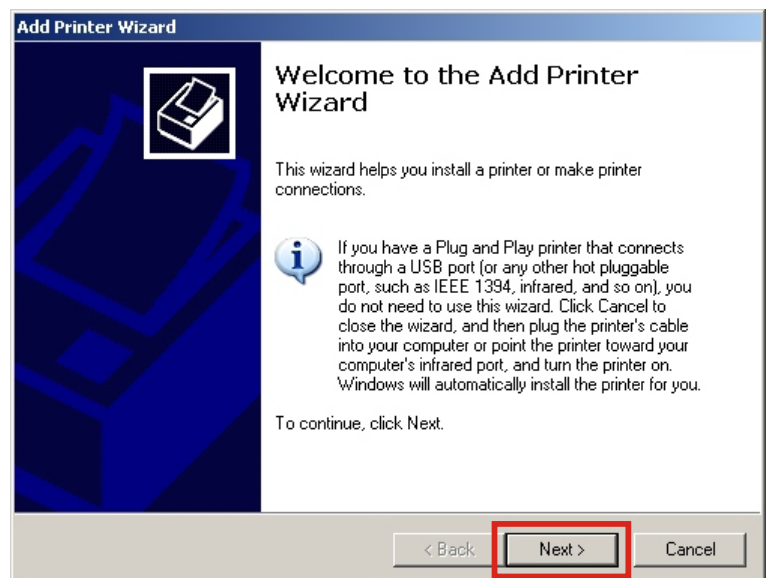


Select "Local printer attached to this computer" and make sure the option "Automatically detect and install my Plug and Play printer" is not checked, then click "Next >".

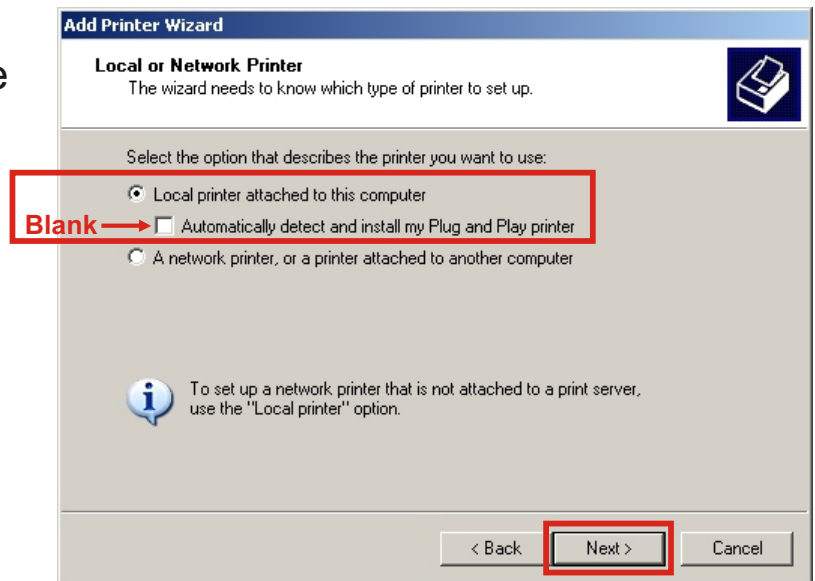


Click the radio button next to "Use the following port:" and select "FILE: (Print to File)" from the pull-down menu, then click "Next >".

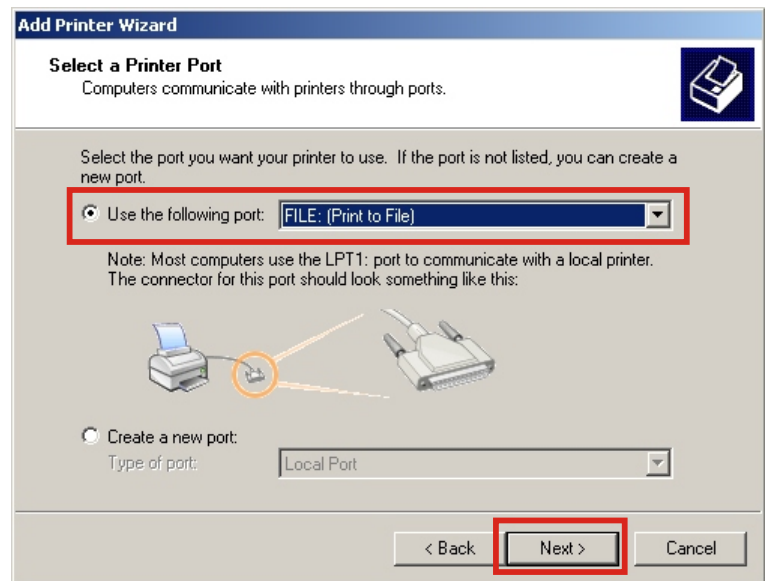


Click "Have Disk..."

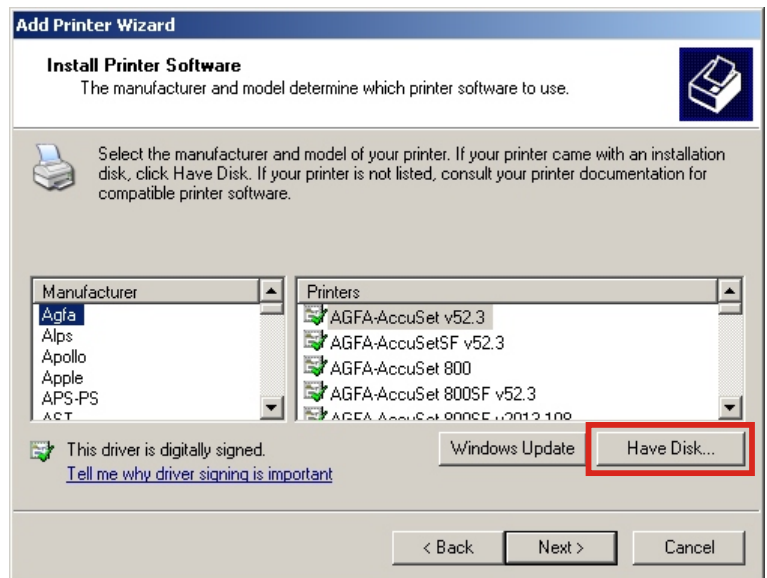


Click "Browse...".

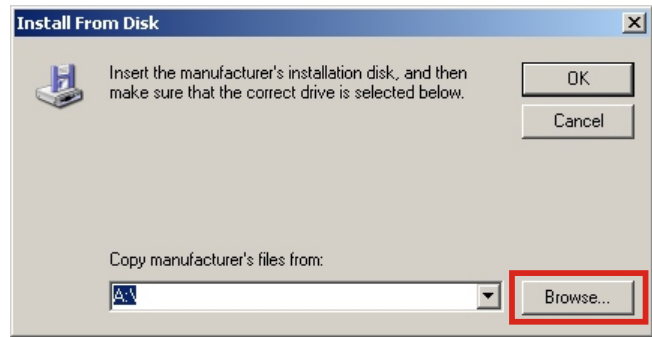


Browse to the folder that contains the files you extracted from the ZIP archive. Select the OEMSETUP.INF file and click "Open".

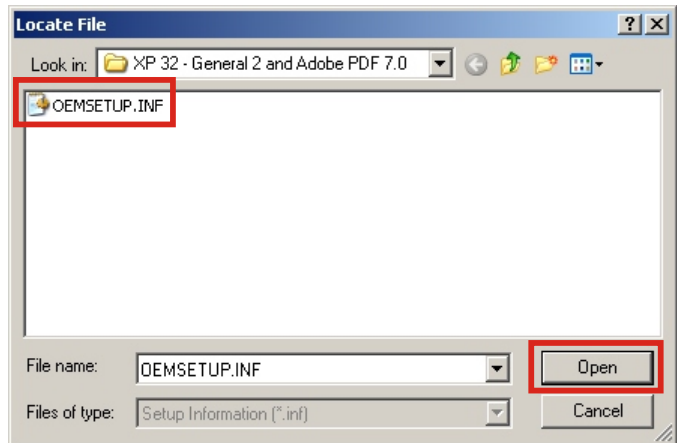

You will return to the previous window, this time with the new path displayed at the bottom. Just click "OK".

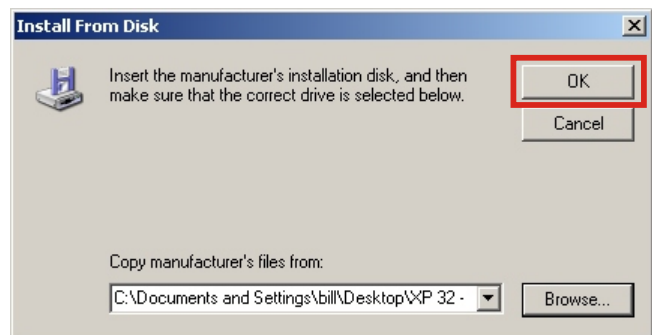

Select the type of driver you wish to install. For black and white, select "General II" and for colour, select "Adobe PDF 7.0". Note: the Adobe PDF 7.0 driver creates a Postscript file as opposed to a PDF file. After selecting the appropriate driver, click "Next >".

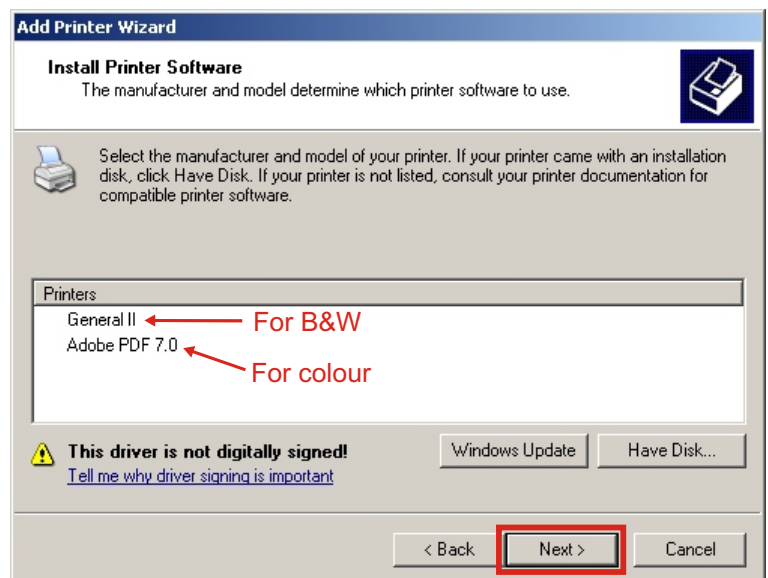

Give the new printer a name ("General II" is fine) and specify whether you want it to be your default printer then click "Next >".

The screenshot shows the 'Name Your Printer' step of the 'Add Printer Wizard'. The title bar reads 'Add Printer Wizard'. The main heading is 'Name Your Printer' with a sub-heading 'You must assign a name to this printer.' and a printer icon. Below this, there is a text box for 'Printer name:' containing the text 'General II'. A note states: 'Type a name for this printer. Because some programs do not support printer and server name combinations of more than 31 characters, it is best to keep the name as short as possible.' Below the text box, there is a question: 'Do you want to use this printer as the default printer?' with two radio button options: 'Yes' and 'No'. The 'No' option is selected. At the bottom right, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a red rectangle.

Click "Next >".

The screenshot shows the 'Printer Sharing' step of the 'Add Printer Wizard'. The title bar reads 'Add Printer Wizard'. The main heading is 'Printer Sharing' with a sub-heading 'You can share this printer with other network users.' and a printer icon. Below this, there is a text box for 'Share name:' which is currently empty. A note states: 'If you want to share this printer, you must provide a share name. You can use the suggested name or type a new one. The share name will be visible to other network users.' Below the text box, there are two radio button options: 'Do not share this printer' and 'Share name:'. The 'Do not share this printer' option is selected. At the bottom right, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a red rectangle.

Select "No" to indicate that you do not need a test page and click "Next >".

The screenshot shows the 'Print Test Page' step of the 'Add Printer Wizard'. The title bar reads 'Add Printer Wizard'. The main heading is 'Print Test Page' with a sub-heading 'To confirm that the printer is installed properly, you can print a test page.' and a printer icon. Below this, there is a question: 'Do you want to print a test page?' with two radio button options: 'Yes' and 'No'. The 'No' option is selected and highlighted with a red rectangle. At the bottom right, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a red rectangle.

Click "Finish".

